



Installation Instructions for Altec Model Ital License Plate Frame

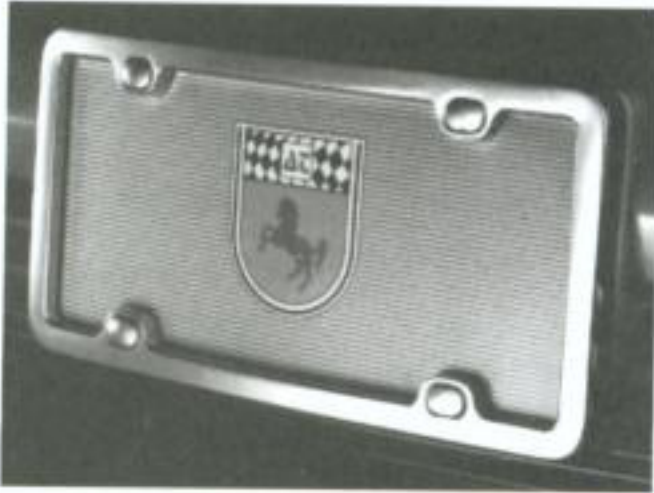

1. Remove Snap-Caps from Ital License Plate Frame by popping them out from the rear. (Caps are also easily removed from the front using a pointed object.)
2. Lay frame face down on a non-abrasive surface and firmly press rubber gasket onto posts in back of frame to ensure proper positioning.
3. Position license plate face down into the back of the rubber gasket, being certain gasket lip fits over the edge of license plate.
4. When installing Ital frame on vehicle with two OEM mounting holes use supplied flat nuts and $1/4"$ -20 x $1/2"$ Machine screws to attach license plate to frame. Position short $1/4"$ -20 machine screws in frame where license plate is not to be attached to vehicle and use flat nut on back of plate.

5. Position assembly on vehicle and secure with appropriate fasteners.
 6. Finish installation by firmly pressing the Snap-Caps into place
- To keep your Ital frame looking good use high quality non-abrasive chrome cleaner

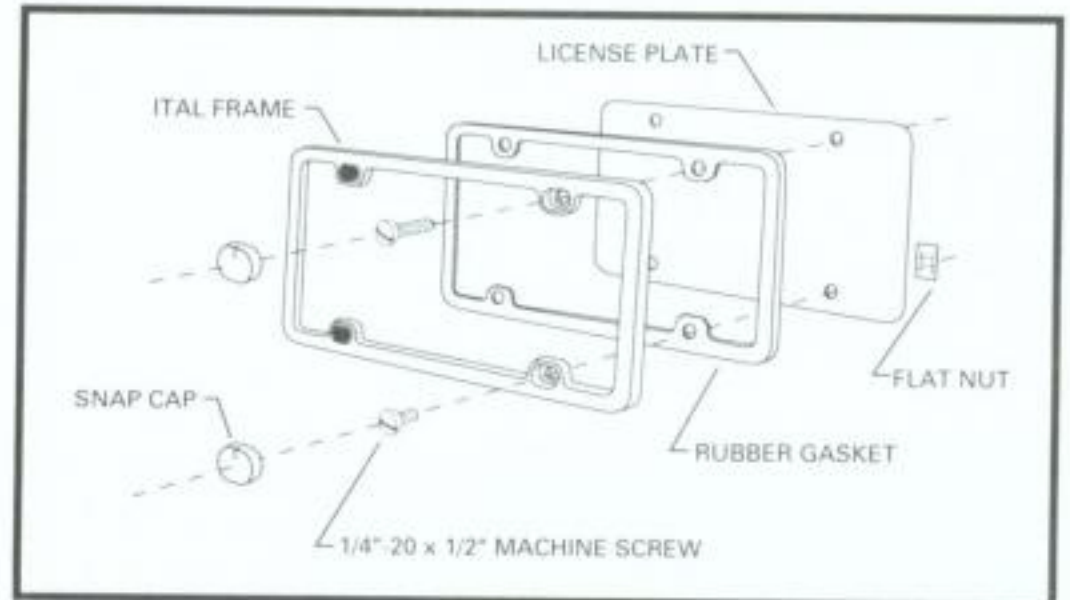

ALTEC PRODUCTS, INC.
14050 Lincoln St. NE
Suite 200
Ham Lake, MN 55304
(763) 785-9035
FAX (763) 785-9084
www.altecproducts.com

DESIGNERS AND MANUFACTURERS OF QUALITY AUTOMOTIVE ACCESSORIES.