




**ALTEC PRODUCTS INC.**  
14050 Lincoln St. NE  
Suite 200  
Ham Lake, MN 55304  
**(763) 785-9035**  
**Fax (763) 785-9084**  
www.altecproducts.com

# 97-02 CORVETTE REAR WINDOW TRIM

*(Only fits 02 models with interior rear window antenna connection wire)*

## Installation Instructions

PATENT PENDING

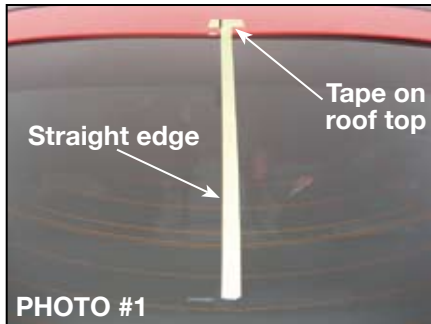


1. Installation of the rear window trim is straight forward. For best results have a helper for assistance.

2. Clean rear window inside and out. A quality glass cleaner like Sparkle will assure a streak free, clean surface. Prior to installation use the supplied alcohol pad on area of window glass where trim piece will mount.

3. Place a piece of masking tape at approximate center of glass on painted roof top. Locate center of rear window by extending line up from center antenna wire in window with straight edge. Mark centerline on tape placed on roof edge (SEE PHOTO #1).




4. Place a piece of masking tape at bottom center of rear body panel. Reference center off crossed flag GM emblem. Place this masking tape on painted body (SEE PHOTO #2).

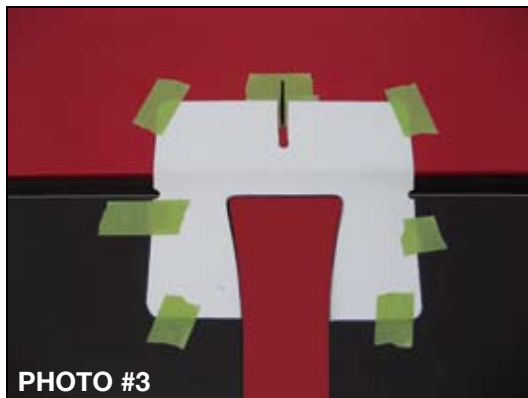

5. Using supplied template line up top mark with slot in template. Line up (2) notches on sides of template with glass edge. NOTE: top of window trim piece (wider end) needs to be located approximately 1/16" below glass edge (SEE PHOTOS #3 AND #4).

6. Remove red liner to expose tape surface. Starting at top with trim 1/16" over glass and centered, lightly lay down trim on window surface. Continue placing the trim down onto glass so that trim lays down and is centered on bottom. If trim is centered then press down firmly onto painted trim to activate the 3M VHB tapes adhesive.

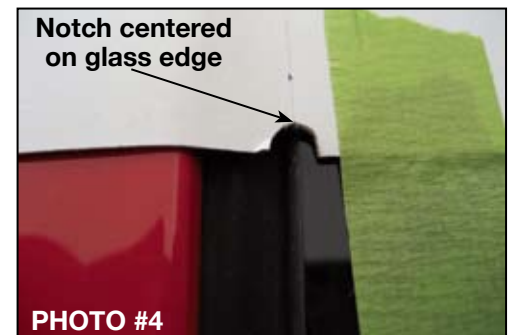

7. Open and lift deck lid. For best results, one person should get into back of Corvette to install interior trim piece. The interior trim piece is slightly narrower than exterior piece. With red tape liner still on interior trim, position trim in place. NOTE: The interior trim piece is notched at the top, this notch allows clearance for the antenna connection wire at center of window. Location of interior trim piece is directly under exterior trim. Remove red tape liner and carefully and lightly place trim on glass. If not positioned correctly pull off and reposition (SEE PHOTO #5).